THE ROOFLIGHT SPECIALISTS

PRODUCT CATALOGUE

_____ 2024 / 2025 _____







Product Overview


Overview VisionStar M & L	4 -5
VisionStar L	6-7
VisionStar M	8-9
VisionStar LED	10-11
VisionVent S pro	12-13
VisionVent S eco	13-14
MPK- Classic - Model 29	14-15
MPK- Classic - Model 32	15-17
MPK- Classic - Model 42	18-19
MPK- Classic - Model 42K	20-21
MPK- Classic - Model 4600	22-23
MPK- Classic - Model 46	23-24
Inner frame with plisse	25-26
Adaptor frame	27-28





en.Close.Good.

That's what the rooflight needs to do!

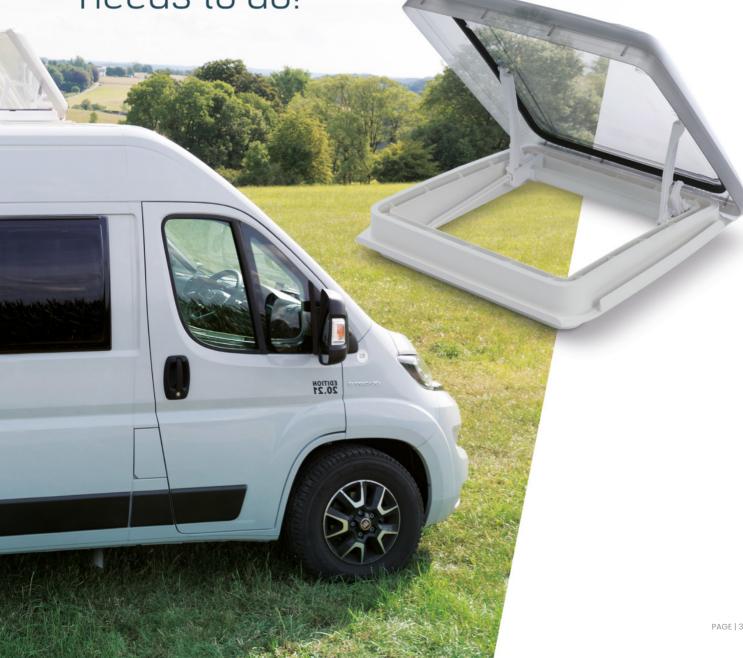



There is nothing we **can** do better.



Not a gimmick in sight - just ease of use and quality you can trust.

Just a rooflight that delivers what we promise: Installation, use, durability - hassle free, easy, reliable. For caravans, motorhomes and everything that travels.



If there's one rooflight in our range that we think is perfect

it's the one from our

VisionStar series

What can it do?



With its sleek design and elegant appearance, it sets new standards in both design and functionality. The simple one-handed operation with the handle bar allows you effortless handling without complicated mechanisms.

Thanks to the steplessly adjustable positioning, you can customize the rooflight exactly to your preferences, whether for light ventilation or fully opening them for maximum fresh air supply.

The rooflights impress not only with their aesthetic design but also with their durability. They are ultra-robustly constructed to withstand various weather conditions.

Additionally, the tinted dome material offers high UV protection, keeping you safe from harmful sun exposure while still allowing you to enjoy natural daylight.

Experience comfort, functionality, and durability with the new rooflight that leaves nothing to be desired.



VisionStar L 700 x 500 mm

The large panoramic rooflight VisionStar L not only provides plenty of light and air in your motorhome or caravan but also offers a unique view. The MPK rooflights from our VisionStar series feature a low-profile design, are easy to operate, steplessly adjustable, particularly noise-reducing, and ultra-durable. The VisionStar L rooflight, measuring 70x50 cm for a 700 x 500 mm cutout, is also available with dimmable, energy-saving LEDs in the inner frame upon reguest.



Features:

- Tinted polycarbonate rooflight with double glazing
- · Steplessly adjustable up to 55°
- Flat dome (only 105 mm above roof level)
- · High UV protection due to tinted dome material
- · Robust domes made of impact-resistant polycarbonate
- · Easy one-handed operation with handle bar
- · Modern inner frame with pleated blind and net
- · Available with or without permanent ventilation



Technical Specifications:

Cut-out dimensions: 700 x 500 mm

Roof thickness: 25 mm - 60 mm

Dome size: 815 x 583 mm

Corner radius: 23 mm

Permanent ventilation: up to 150 cm²

Height above roof: 105 mm

Frame dimensions: 872 x 610 x 37 mm



Roof	Frame Color	Permanent	Weight
Thickness		Ventilation	
up - to	cream white I signal white		аррх.
25-60 mm	7503PW 7503PSW	0 cm²	8185 g
25-60 mm	7503PW75 7503PSW75	75 cm²	8095 g
25-60 mm	7503PW150 7503PSW150	150 cm²	7970 g

signal white		cream white
--------------	--	-------------





VisionStar L







VisionStar M 400 x 400 mm

The VisionStar M rooflight redefines the experience of your motorhome or caravan. With its sleek, elegant design, it reduces noise and drafts, making your travels more comfortable and relaxing. Thanks to its generous opening angle, you can not only enjoy the natural beauty of the landscape but also maximize daylight and fresh air, transforming your vehicle into a bright, inviting home.

Woight

Dormanont

Features:

- Tinted polycarbonate rooflight with double glazing
- Steplessly adjustable up to 50°
- · Very low-profile dome (only 80 mm above roof level)
- · High UV protection due to tinted dome material
- · Robust made of impact-resistant polycarbonate
- · Easy one-handed operation with handle bow
- · Modern inner frame with pleated blind and net
- · Available with or without permanent ventilation



Technical Specifications:

Cut-out dimensions: 400 x 400 mm

Roof thickness range: 25mm-60mm & 55-90mm

Dome size: 490 x 470 mm Corner radius: 28 mm

Permanent ventilation: up to 150 cm²

Height above roof: 80 mm

Doof

Frame dimensions: 565 x 530 x 35 mm

Enamo Colon




ROOT	Frame Color	Permanent	weight
Thickness		Ventilation	
up - to	cream white I signal white		аррх.
25-60 mm	4903PW 4903PSW	0 cm²	3760 g
25-60 mm	4903PW75 4903PSW75	75 cm²	3725 g
25-60 mm	4903PW150 4903PSW150	150 cm²	3680 g
55-90 mm	4913PW 4913PSW	0 cm²	4222 g
55-90 mm	4913PW75 4913PSW75	75 cm²	4182 g
55-90mm	4913PW150 4913PSW150	150 cm²	4139 g



Available colors:					
	signal white		cream white		







VisionStar L LED

Technical Specifications:

Cut-out dimensions: 700 x 500 mm

Dome size: 815 x 707 mm

Corner radius: 23 mm

Permanent ventilation: up to 150 cm²

Height above roof: 105 mm

Frame dimensions: 872 x 650 x 37 mm

	Roof Thickness	Frame Color	Permanent Ventilation	Weight
_	up - to	cream white I signal white		аррх.
	25-60 mm	7503PLW 7503PLSW	0 cm²	8485 g
	25-60 mm	7503PLW75 7503PLSW75	75 cm²	8395 g
	25-60 mm	7503PLW150 7503PLSW150	150 cm²	8270 g





VisionStar M LED

Technical Specifications:

Cut-out dimensions: 400 x 400 mm

Dome size: 490 x 470 mm

Corner radius: 28 mm

Permanent ventilation: bis zu 150 cm²

Height above roof: 80 mm

Frame dimensions: 565 x 570 x 35 mm

Frame Color	Dermanent

Roof	Frame Color	Permanent	Weight
Thickness		Ventilation	
up - to	cream white I signal white		anny
<u>up - to</u>	Ci eain willte i signal willte		аррх.
25-60 mm	4903PLW 4903PLSW	0 cm²	3960 g
05 00	/000DLWZE I /000DL0WZE	752	2025 -
25-60 mm	4903PLW75 4903PLSW75	75 cm²	3925 g
25-60 mm	4903PI W150 4903PI SW150	150 cm²	3880 g
			9
55-90 mm	4913PI W 14913PI SW	0 cm²	4404 a
33-30111111	4513PLVV 14513PL3VV	U CITI	4404 g
55-90 mm	4913PLW75 4913PLSW75	75 cm²	4362 g
50 00 111111	10.0. 2007 0 1 10.01 2007 0	7 0 0111	1002 9
55-90mm	4913PLW150 4913PLSW150	150 cm²	4320 g
			- 3

PAGE | 10





Available colors:



signal white



cream white



VisionVent S pro 280 x 280 mm

With the VisionVent series rooflight from MPK, condensation water in caravans and motorhomes is a thing of the past. Thanks to a clever design featuring covered ventilation, air cushions to prevent drips, and channels for drainage, condensation is minimized even in adverse weather conditions and with intensive use of the vehicle's interior. The aerodynamic design enhances travel comfort by reducing road noise and minimizing drafts.



Features:

- Tinted glass rooflight with telescopic props
- · Four-way adjustable
- · High UV protection due to tinted dome material
- Permanent ventilation between domes to reduce condensation
- · Modern inner frame with double pleated blind



Technical Specifications:

Cut-out dimensions: 280 x 280 mm

Roof thickness range: 24mm-46mm & 42-72mm

Dome size: 380 x 395 mm

Corner radius 18 mm

Permanent ventilation: 75 cm²

Height above roof: 80 mm

Frame dimensions: 365 x 340 x 32 mm



Roof	Frame Color	Permanent	Weight
Thickness		Ventilation	
up - to	cream white I signal white		аррх.
24-46 mm	2753VPW 2753VPSW	with	1800 g
46-72 mm	2763VPW 2763VPSW	with	1880 g
24-46 mm	2753VPNW 2753VPNSW	without	1750 g
46-72 mm	2763VPNW 2763VPNSW	without	1830 g

Available colors:

signal white cream white











VisionVent S eco 280 x 280 mm

Features:

- Tinted glass rooflight with telescopic props
- · Four-way adjustable
- · High UV protection due to tinted dome material
- Permanent ventilation between domes to reduce condensation
- · Folding frame with mosquito net, optional roller blind



Technical Specifications:

Cut-out dimensions: 280 x 280 mm

Roof thickness: 24mm-46mm & 42-72mm

Dome size 380 x 395 mm Corner radius: 18 mm

Permanent ventilation: 75 cm² Height above roof: 80 mm

Frame dimensions: 315 x 315 x 8 mm



Roof	Frame Color	Roller	Weight
Thickness		blind	
up - to	white I signal white I grey I beige		ca.
24-46 mm	2753VNRW 2753VNRSW 2753VNRG 2753VNRB	with	1800 g
46-72 mm	2763VNRW 2763VNRSW 2763VNRG 2763VNRB	with	1800 g
24-46 mm	2753VNW 2753VNSW 2753VNG 2753VNB	without	1750 g
46-72 mm	2753VNW 2753VNSW 2753VNG 2753VNB	without	1830 g








MPK - Classic 280 x 280 mm

frosted glass

The Model 29 is our smallest rooflight. It provides fresh air ventilation in your motorhome and, thanks to its polypropylene frosted glass, gently diffuses daylight into the interior. A folding mesh frame protects against insects while allowing light and air to enter the caravan, and the optional roller blind ensures darkening for a comfortable night's sleep.

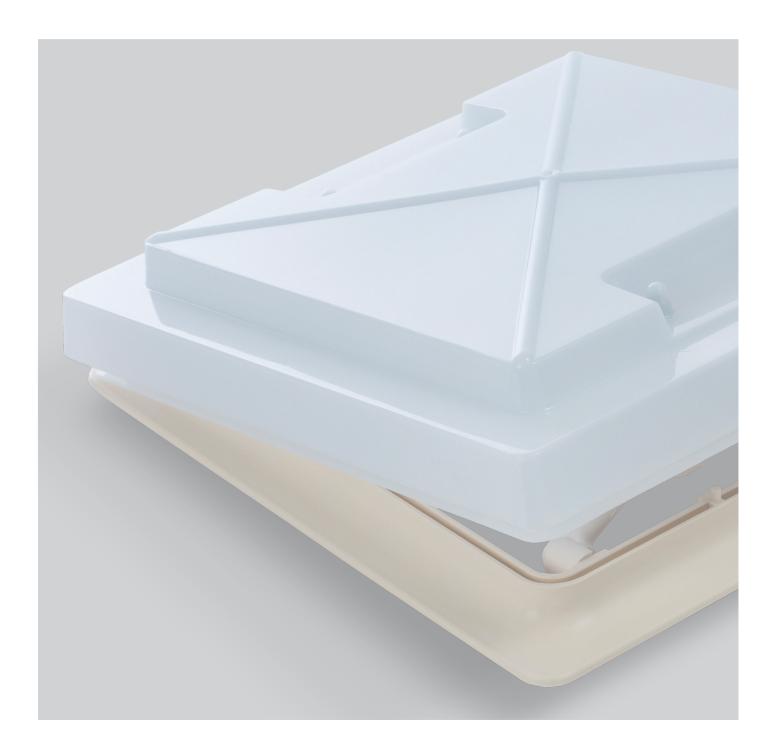



Model 29



Features:

- · Compact, space-saving frosted glass dome made from polypropylene
- Telescopic props, four-way tiltable, with locking mechanism
- · Folding frame with mosquito net, optional roller blind
- · Also available with a double pleated inner frame (optional)



Technical Specifications:

Cut-out dimensions: 280 x 280 mm

Roof thickness: 24mm-46mm & 42-72mm

Dome size: 330 x 330 mm Corner radius: 18 mm

Permanent ventilation: 60 cm² Height above roof: 78 mm

Frame dimensions: 315 x 315 x 8 mm







Roof	Frame Color	Roller	Weight
Thickness		blind	
up - to	cream white I beige I grey		аррх.
24-46 mm	290VNRW 290VNRB 290VNRG	mit	1180 g
46-72 mm	291VNRW 291VNRB 291VNRG	mit	1280 g
24-46 mm	290VNW 290VNB 290VNG	ohne	1250 g
46-72 mm	291VNW 291VNB 291VNG	ohne	1350 g









MPK - Classic 320 x 360 mm

frosted glass

The small MPK rooflight Model 32 provides fresh air ventilation in your motorhome and, thanks to its polypropylene frosted glass, allows soft daylight to enter the interior. A folding mesh frame protects against insects while letting light and air into the caravan.





Model 32



Features:

- · Compact, space-saving frosted glass dome made of polypropylene
- Telescopic props, four-way tiltable, with locking mechanism
- · Folding frame with mosquito net, optional roller blind



Technical Specifications:

Cut-out dimensions: 320 x 360 mm Roof thickness range: 24mm-56mm

Dome size: 380 x 420 mm

Permanent ventilation: 120 cm²

Height above roof: 83 mm





Roof	Frame Color	Net	Weight
Thickness			
up - to	beige		аррх.
24-46 mm	320VB	without	1350 g
24-46 mm	320VNB	with	1400 g







MPK - Classic 400 x 400 mm

frosted glass

Our compact and space-saving rooflight Model 42 provides fresh air ventilation in your motorhome and, thanks to its polypropylene frosted glass, allows gentle daylight to fill the interior. A folding mesh frame and the optional blackout roller blind ensure protection against insects and sunlight.






Model 42

Features:

- Compact, space-saving frosted glass dome made of polypropylene
- Telescopic props, four-way tiltable, with locking mechanism
- · Mesh frame available with or without blackout roller blind



Technical Specifications:

Cut-out dimensions: 400 x 400 mm

Roof thickness: 24mm-56mm & 42-70mm

Dome size: 470 x 470 mm Corner radius: 28 mm

Permanent ventilation: 150 cm²

Height above roof: 91 mm


Frame dimensions: 470 x 470 x 14 mm





	Roof	Frame Color	Roller	Weight
_	Thickness		blind	
	up - to	cream white I beige I grey		аррх.
	24-56 mm	420VNRW 420VNRB 420VNRG	with	2390 g
	46-70 mm	421VNRW 421VNRB -	with	2480 g
	24-46 mm	420VNW 420VNB 420VNG	without	2250 g
	46-70 mm	421VNW 421VNB -	without	2340 g











MPK - Classic 400 x 400 mm


frosted glass

The elegant rooflight variant 42K with an innovative combination roller blind frame offers the a high level of comfort. The integrated flyscreen and blackout blinds not only protect against annoying insects and glaring sunlight but also create a pleasant atmosphere inside. The polypropylene frosted glass provides gentle daylight in the living area. Additionally, enjoy the refreshing airflow that this rooflight provides for your motorhome.





Model 42K



Features:

- Compact, space-saving frosted glass dome made of polypropylene
- Telescopic props, four-way tiltable, with locking mechanism
- Double roller blind combination frame



Technical Specifications:

Cut-out dimensions: 400 x 400 mm

Roof thickness: 24mm-56mm & 42-70mm

Dome size: 470 x 470 mm Corner radius: 23 mm

Permanent ventilation: 150 cm²

Height above roof: 91 mm

Frame dimensions: 470 x 470 x 14 mm





Roof	Frame Color	Roller	Weight
Thickness		blind	
up - to	white I grey		аррх
24-56 mm	420VKRW I 420VKRG	with	2460 g
42-70 mm	421VKRW 421VKRG	with	2540 g










MPK - Classic 400 x 400 mm

clear glass

The Model 4600 rooflight provides fresh air ventilation in your motorhome and, thanks to its transparent polypropylene, allows plentiful daylight into the interior. The large overhang, along with the snow and splash guard, protects against water intrusion, while inside, a folding mesh frame and an optional blackout roller blind shield against insects and sunlight.

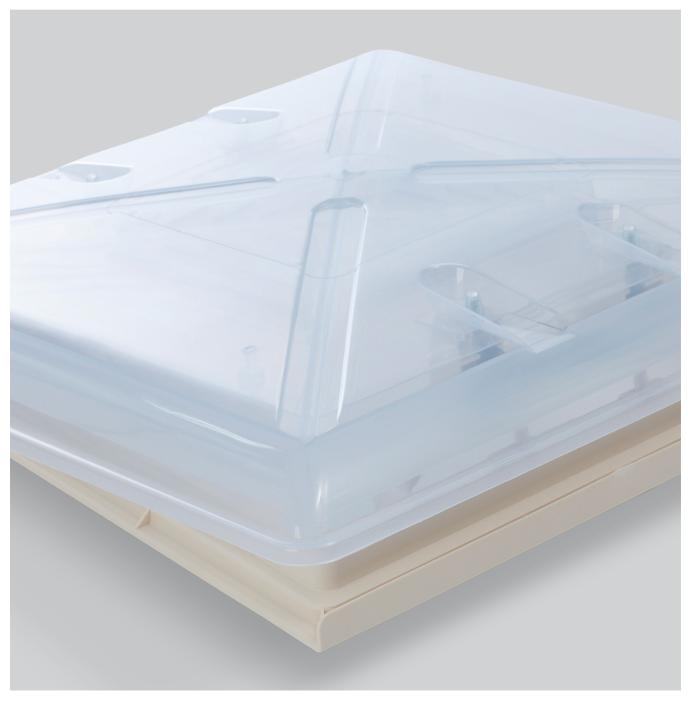




Model 4600













Features:

Domes made of polypropylene frosted glass with a large overhang

- · Equipped with snow and splash guard edge
- · Telescopic props, four-way tiltable, with locking mechanism
- · Mesh frame available with or without blackout roller blind or pleated frame
- · Optional double roller blind combination frame

Technical Specifications:

Cut-out dimensions: 400 x 400 mm

Roof thickness: 24mm-56mm &

42-70mm

Dome size: 560 x 560 mm

Corner radius: 28 mm

Permanent ventilation: 150 cm²

Height above roof: 92 mm

Frame dimensions: 470 x 470 x 14 mm

	Roof	Frame Color	Roller	Weight
_	Thickness		blind	
	up - to	cream white I beige I grey		аррх.
	24-46 mm	4600VNRW 4600VNRB 4600VNRG	with	2715 g
	46-70 mm	4610VNRW 4610VNRB 4610VNRG	with	1800 g
	24-46 mm	4600VNW 4600VNB 4600VNG	without	1750 g
	46-70 mm	4610VNW 4610VNB 4610VNG	without	1830 g









MPK - Classic 400 x 400 mm

frosted glass





MPK Model 46













Features:

- Domes made of polypropylene frosted glass with a large overhang
- · Snow and splash guard edge
- Telescopic props, four-way tiltable, with locking mechanism
- · Mesh frame available with or without blackout roller blind or pleated frame
- · Optional double roller blind combination frame

Technical Specifications:

Cut-out dimensions: 400 x 400 mm

Roof thickness: 24mm-56mm &

42-70mm

Dome size: 560 x 560 mm

Corner radius: 28 mm


Permanent ventilation: 150 cm²

Height above roof: 92 mm

Frame dimensions: 470 x 470 x 14 mm

	Roof	Frame Color	Roller	Weight
	Thickness		blind	
_	up - to	cream white I beige I grey		аррх.
	24-46 mm	460VNRW 460VNRB 460VNRG	with	2855 g
	46-70 mm	461VNRW 461VNRB 461VNRG	with	2945 g
	24-46 mm	460VNW 460VNB 460VNG	without	2715 g
	46-70 mm	461VNW 461VNB 461VNG	without	2805 g

Available colors:








grey



Inner frame with plisse

The MPK rooflights with matching inner frames offer you even more comfort when camping. Fly nets let in light and air and keep mosquitoes and spiders out. A pleated blackout blind ensures undisturbed sleep without impairing the exchange of air. With illuminated inner frames on your rooflight, you have a practical central light source: energy-saving dimmable LEDs provide warm lighting in the desired brightness.









Item/	Frame	Frame Color	Weight
Product version	dimensions		аррх.
		cream white I signal white	
Model 27	365 x 340 x 32 mm	2750.22PW-K 2750.22PSW-K	500 g
Model 49P	565 x 530 x 35 mm	4750.22PW-K 4750.22PSW-K	970 g
Model 75P	872 x 610 x 37 mm	7550.22PW-K 7550.22PSW-K	1400 g

with LED










Item/	Frame	Frame Color	Weight
Product version	dimensions		аррх.
		cream white I signal white	
Model 49P	565 x 570 x 35 mm	4750.22PLW-K 4750.22PLSW-K	1170 g
Model 75P	872 x 650 x 37 mm	7550.22PLW-K 7550.22PLSW-K	1660 g


Available colors:

signal white





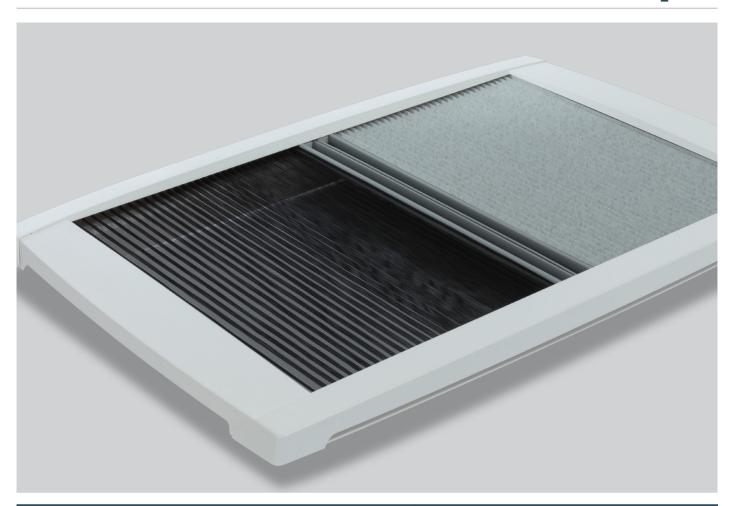

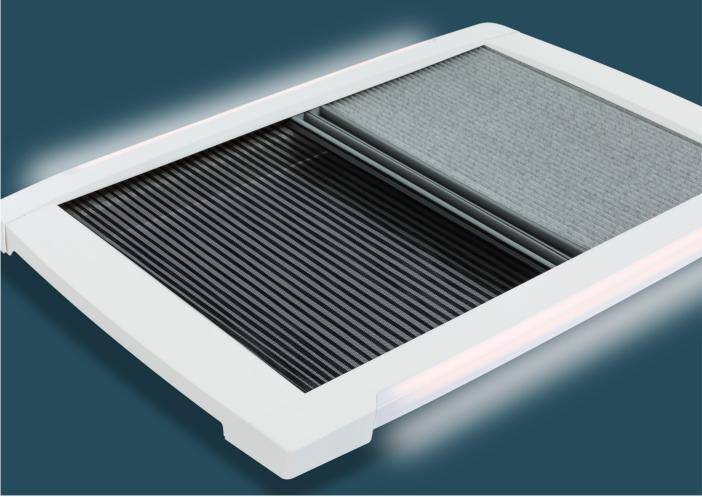



Vans such as the Fiat Ducato, Citroën Jumper or Peugeot Boxer are becoming increasingly popular for conversion into camper vans. With our adaptor frames for rooflights, you can also enjoy the advantages of MPK rooflights in your camper van. In sizes for the cut-out dimensions 700 x 500 mm, 400 x 400 mm and 280 x 280 mm, the adaptor frames ensure the secure attachment of our corresponding rooflight models.

rame.









Itel/	Frame dimensions	Frame Color	Weight
Product version			аррх.
		weiß	
Model 27	280 x 280 mm	2828ARW	150 g
Model 49	400 x 400 mm	4040ARW	199 g
Model 75	700 x 500 mm	7050ARW (Installation position: front)	760 g
Model 75	700 x 500 mm	7050ARW1 (Installation position: rear)	800 g

Available colors:



cream white







THE ROOFLIGHT SPECIALISTS

PRODUCT CATALOGUE

MPK Metall- und Plastikverarbeitung GmbH & Co. KG Friedrich-Ebert-Straße 298-300 D-58566 Kierspe/ Germany

Phone: +49 23 59 / 90 88 - 0

E-Mail: INFO@MPK-ROOFLIGHTS.COM